

ARCHITEC 400® is an extremely strong knitted shadecloth that has been designed for very large commercial tension membrane structures and shade sails.



ARCHITEC 400®

EXTRA HEAVY DUTY KNITTED SHADECLOTH

*Protecting people
just like you*



www.PolyfabUSA.com



ARCHITEC 400® EXTRA HEAVY DUTY KNITTED SHADECLOTH

Architec 400® is tough under the sun

Architec 400® is a 400gsm High Density Polyethylene (HDPE) fabric with an excellent weight to strength ratio. It has very good tensile strength and is extremely resistant to tearing.

Architec 400® incorporates the latest in Ultra Violet (UV) stabilizers. These new generation stabilizers extend the UV life of the fabric so that Polyfab can now offer a 15 year warranty – the best industry warranty available (conditions apply). These new UV stabilizers also provide improved color consistency and colorfastness.

Ovalon™ is our propriety monofilament yarn

Architec 400® contains no flat tape. Instead it is made from a combination of monofilament yarn and our new Ovalon™ monofilament yarn.

Ovalon™ provides excellent strength and has minimal stretch in both the Weft and Warp direction of the stitch pattern and will maintain its tension. It also provides very high UV protection over 90%.

With Ovalon™ you get the strength of monofilament yarns combined with the UV protection of tape.



Architec 400® is good under tension

Shadesails using Architec 400® should be well designed and engineered to hold the fabric under the tension it deserves.

The fabric should be supported by using appropriate strength poles and footings as determined by a professional engineer, and fabricated and installed by a qualified contractor in accordance with local building codes.

Architec 400® is easy to work with

Architec 400® has been pre-stentered to reduce shrinkage and improve the stability of the fabric. This process improves the workability of the fabric during the fabrication and installation of the shadesails or shade structure.


Available sizes:

12.5 feet / 3.8 meters (width) x
55 yards / 50 meters (length)
straight rolls (not folded)

Nominal weight:

12 oz. per square yard / 400 gsm

Architec 400® is available in 12 designer colors.

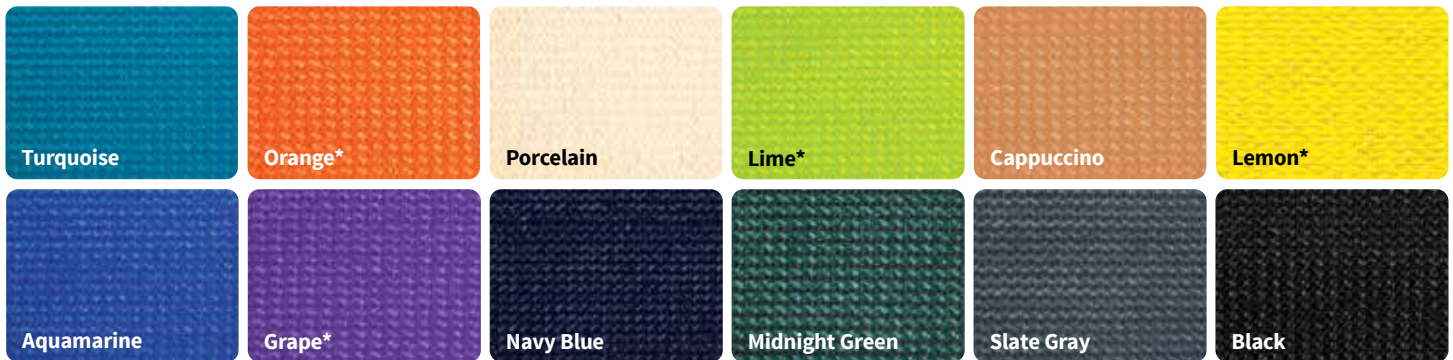

*The new version of these colors have improved pigments that make them slightly more intense than the original color shades.

COLOR	COVER FACTOR	SHADE FACTOR	UVR BLOCK%	CALCULATED UVE%	PROTECTION CATEGORY	SRI
1. Turquoise	92.6	84.7	91.0	90.0	Effective	NA
2. Porcelain	93.5	73.0	92.3	91.0	Very Effective	87
3. Cappuccino	96.1	86.6	95.8	95.0	Most Effective	36
4. Aquamarine	95.2	91.0	94.5	93.0	Very Effective	31
5. Navy Blue	95.2	92.4	94.3	94.0	Very Effective	NA
6. Midnight Green	94.7	93.1	94.6	93.0	Very effective	NA
7. Orange	94.7	84.7	94.8	93.0	Very effective	61
8. Lemon	91.4	69.1	91.4	89.0	Effective	79
9. Grape	87.3	77.6	87.0	88.0	Effective	NA
10. Lime	95.3	88.0	95.3	94.0	Very Effective	56
11. Slate	95.3	95.0	95.2	94.0	Very Effective	NA
12. Black	96.6	97.2	96.5	95.0	Most Effective	1

TABLE 3.1
Ultraviolet Effectiveness (UVE)
Classification System


UVE (%)	Protection category
80.0 to 90.9	Effective
91.0 to 94.9	Very effective
95.0+	Most effective

According to revised Australian standard AS 4174:2018 for knitted and woven shade fabrics, "The objective of the Standard is to provide requirements for the classification, performance and labelling of knitted and woven shade fabrics for horticultural and human protection uses."

"Shade fabrics shall be classified according to ultraviolet effectiveness (UVE), and human protection category ... shall be designated with a protection category in accordance with Table 3.1."


Biaxial Stretch Test Reports

Load Diagram

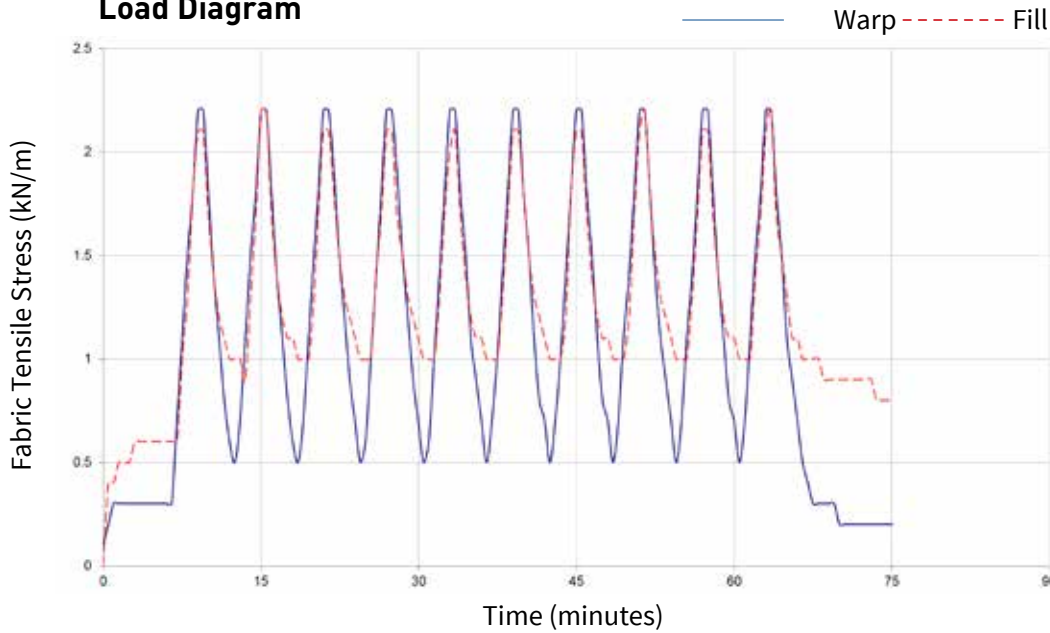

BIAxIAL STRETCH TEST REPORT	
Client	Polyfab Australia Pty Ltd
Supplier	Polyfab Australia Pty Ltd
Material	Architec400
Roll No.	N/A
Stress Ratio	1:1
Test Date	20/10/2016

Biaxial Elongation

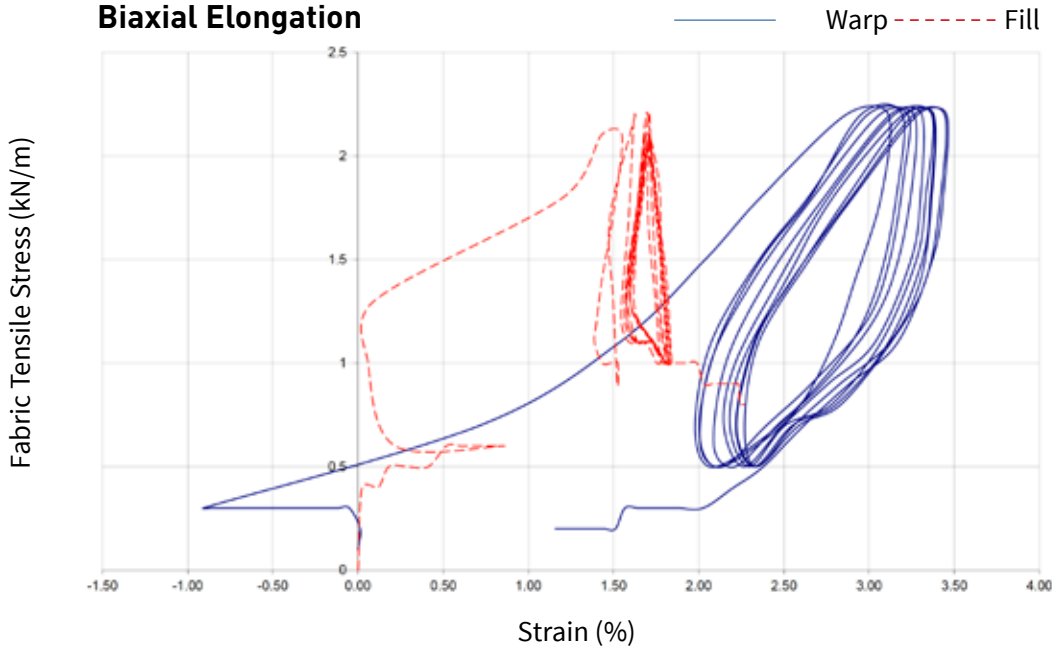

BIAxIAL STRETCH TEST REPORT	
Client	Polyfab Australia Pty Ltd
Supplier	Polyfab Australia Pty Ltd
Material	Architec400
Roll No.	N/A
Stress Ratio	1:1
Test Date	20/10/2016

Technical Specifications

		WARP	WEFT
Breaking Force (per ASTM D-5034)	lbs	342	270
Elongation at Break (per ASTM D-5034)	%	87	96
Tearing strength (per ASTM D-2261)	lbs	41	38
Mullen Burst (per ASTM D-3786)	lbs/in	Face	593
Ball Burst (per ASTM D-3787)	lbf	Face	450+*

*(Remarks: + Exceeds capacity of tester.)

Finished structures should be properly engineered by a professional engineer and installed by a qualified contractor in accordance with local building codes.



Fire Standard Compliance: Architec 400* complies with fire standard: ASTM E-84 (Class 1 or A rating)



This structure was installed in 2000 and is still exceeding customer expectations

Product Disclaimers:

- The Manufacturer reserves the right to alter or modify product specifications and colors without notice, and assumes no obligation or liability for the suitability and use of its products other than those applications intended by the manufacturer.
- Colors shown may not be an exact representation of the actual product.
- Polyfab USA assumes no liability in the event of negligent installation /fabrication or application or choice of cloth.
- During installation, Polyfab shade cloth should not be subject to "pre-stressed" loading in excess of 20%.

- Outdoor fabrics are subject to harsh conditions and degradation over time is to be expected. Architec 400® is supported with a 15 year UV warranty. During this period the fabric will remain serviceable and fit for purpose. Color fading is normal over time. Colors containing red and yellow pigments have a tendency to fade more than others. This is not a loss of strength caused by UV breakdown and is not covered by the product warranty. For more details refer to the supporting Polyfab product warranty.

www.PolyfabUSA.com

ARCHITEC 400® CAN BE PURCHASED FROM:

